



Specification

Nominal voltage	12 Volts	
Rated capacity (C ₂₀ Hour rate at 27°C)	100 Ampere Hour	
Dimensions	Length	393mm
	Width	173mm
	Height	221mm
Weight ± 1.0 Kgs (approx.)	32.5 Kgs	

Characteristics *




Capacity@ 80.6°F (27°C)	20 hour rate (5.0A) upto 10.5V	100.0 Ah
	10 hour rate (9.31A) upto 10.5V	93.10 Ah
	5 hour rate (17.15A) upto 10.2V	85.75 Ah
	1 hour rate (63.70A) upto 9.6V	63.70 Ah
	15 minute rate (172.40A) upto 9.6V	43.10 Ah
Internal resistance	Fully charged battery 80.6°F (27°C)	5.60 mΩ
Capacity affected (Temperature at C ₂₀ hour rate)	104°F (40°C)	110%
	80.6°F (27°C)	100%
	32°F (0°C)	80%
	5°F (-15°C)	60%
Self discharge 80.6°F (27°C)	Capacity after 3 month storage	90%
	Capacity after 6 month storage	80%
Terminal Type	M8×25 mm Copper terminal	
Short circuit current	2220 A	

Constant power discharge rating watts per battery @ 27 °C*






ECV	DURATION											
	10 min	15 min	20 min	30 min	60 min	2 hrs	3 hrs	5 hrs	8 hrs	10 hrs	20 hrs	
1.60	2416	2010	1500	1209	750	453	331.0	222.0	151.0	122.0	62.0	
1.65	2362	1947	1438	1183	734	447	322.0	217.0	148.0	121.0	61.5	
1.70	2308	1883	1376	1157	717	440	313.0	212.0	145.0	120.0	61.0	
1.75	2254	1820	1364	1131	700	433	304.0	207.0	142.0	119.0	60.5	
1.80	2200	1756	1352	1105	683	426	295.0	202.0	139.0	118.0	60.0	

Constant current discharge rating amperes @ 27 °C *

ECV	DURATION											
	10 min	15 min	20 min	30 min	60 min	2 hr	3 hr	5 hr	8 hr	10 hr	20 hr	
1.60	217.39	172.41	140.80	102.04	63.69	39.39	26.92	18.53	11.49	9.72	5.36	
1.65	210.74	166.85	136.10	100.52	63.09	37.79	26.10	17.84	11.24	9.605	5.22	
1.70	204.10	161.30	131.50	99.00	62.50	36.19	25.29	17.15	10.99	9.49	5.09	
1.75	200.00	158.70	129.80	98.00	61.00	35.71	25.25	17.09	10.93	9.31	5.00	
1.80	196.10	153.80	126.50	96.20	59.50	35.46	25.13	16.95	10.87	9.26	4.97	

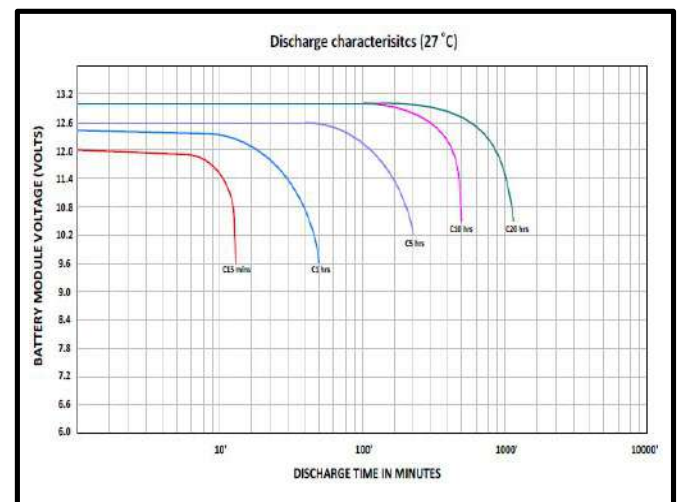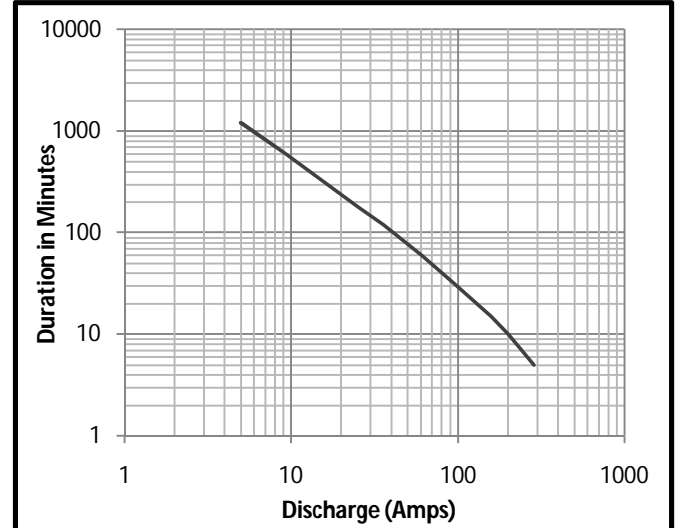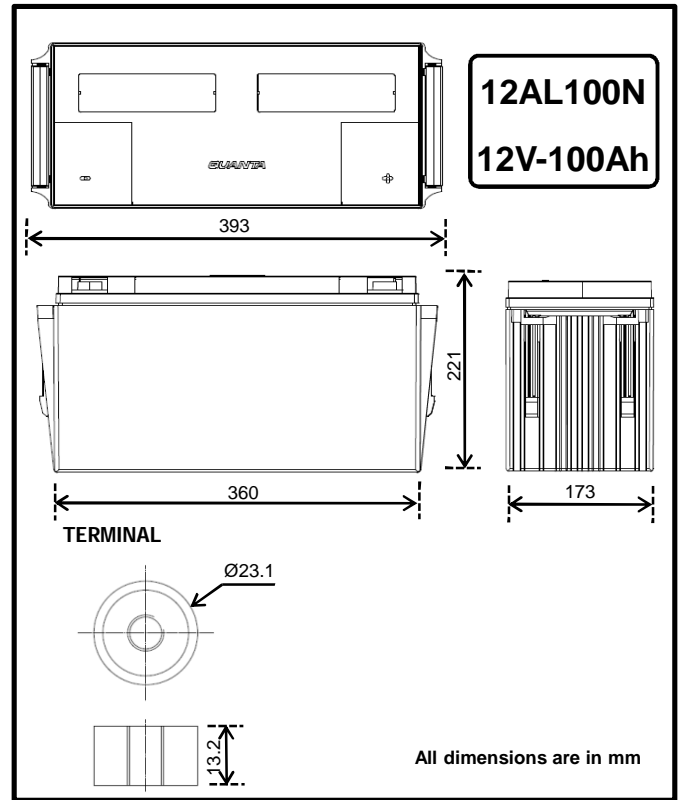

*Note: The above data are average values and can be obtained within three charge/discharge cycles
A tolerance of ±5% is applicable for the above constant power discharge and constant current discharge values

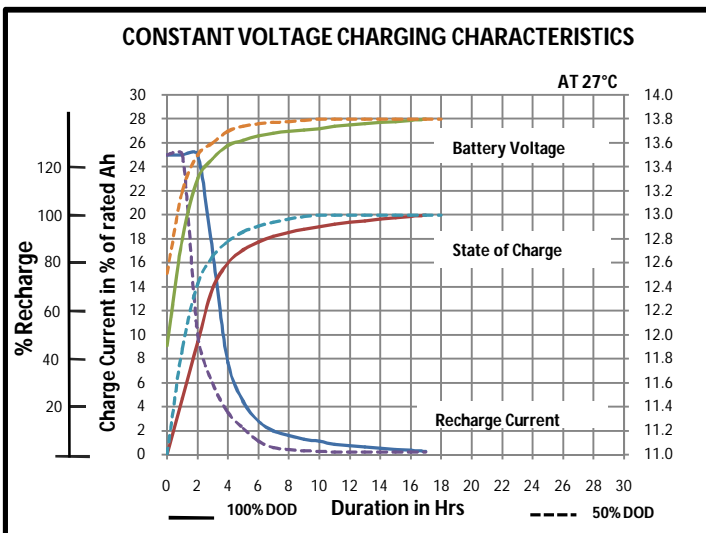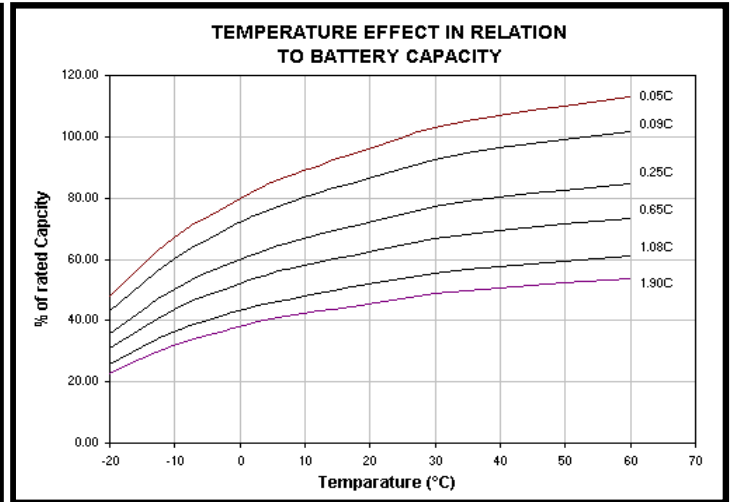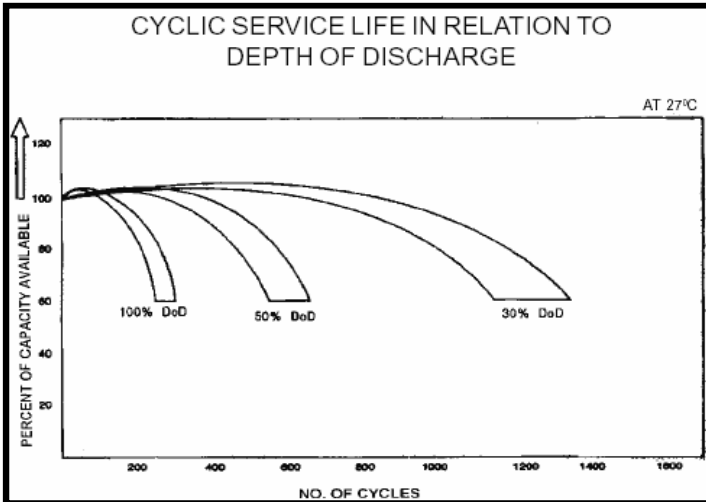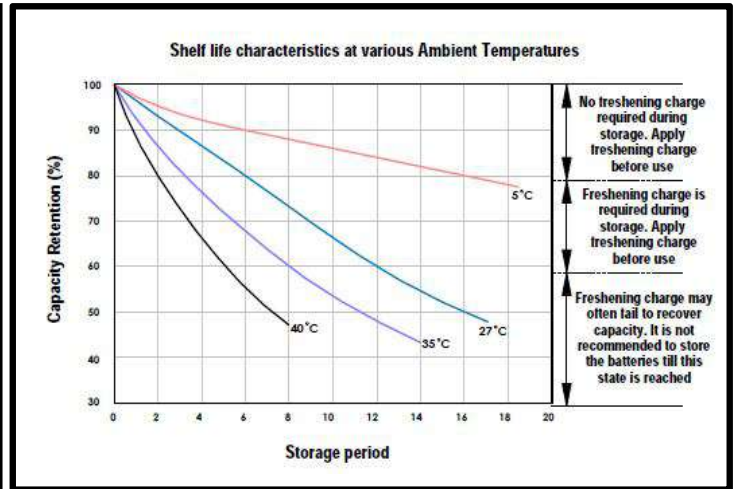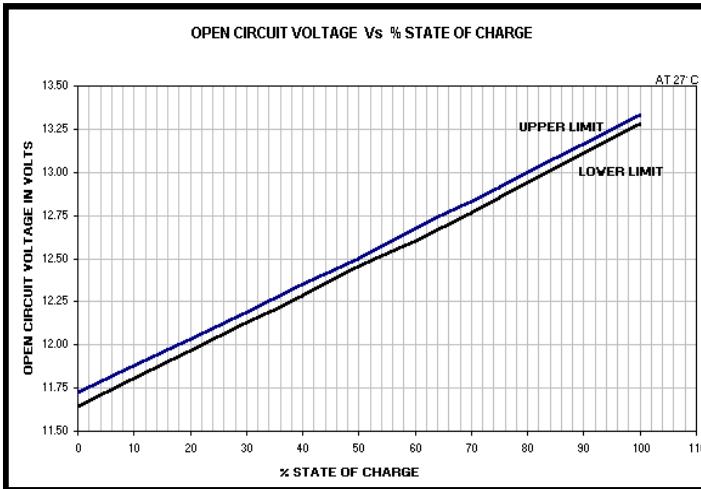

CHARGING METHODS:

Constant voltage charging at 27° C

Stand by use	: Charging voltage 13.5V/battery
Max. Charging current	: 25 % of rated Ah capacity
Cyclic use	: Charging voltage 13.8V/Battery
Max. Charging current	: 25 % of rated Ah capacity
Temperature compensation	: 18 mV/battery/°C

CAUTION:

- ⚡ Avoid short circuit
- 🚫 Don't charge in a sealed container

AMARARAJA BATTERIES LTD.

(An Amara Raja – Johnson controls company)

Regd. Office
Manufacturing facility & Central Distribution center
 Karakambadi - 517520, Tirupathi – AP , INDIA
 ☎ +91-877-2265000 📠 +91-877-2285600
 ✉ amararaja@amararaja.co.in

Amara Raja Batteries Ltd.
 Terminal A
 1-18/1/AMR/NR, Nanakramguda
 Gachibowli, Hyderabad - 500032
 INDIA ☎ +91-40-23139000 📠 +91-40-23139001
 ✉ mktg@amararaja.co.in

Quality systems certified to

EN ISO 14001:2004
 ISO/TS 16949: 2009